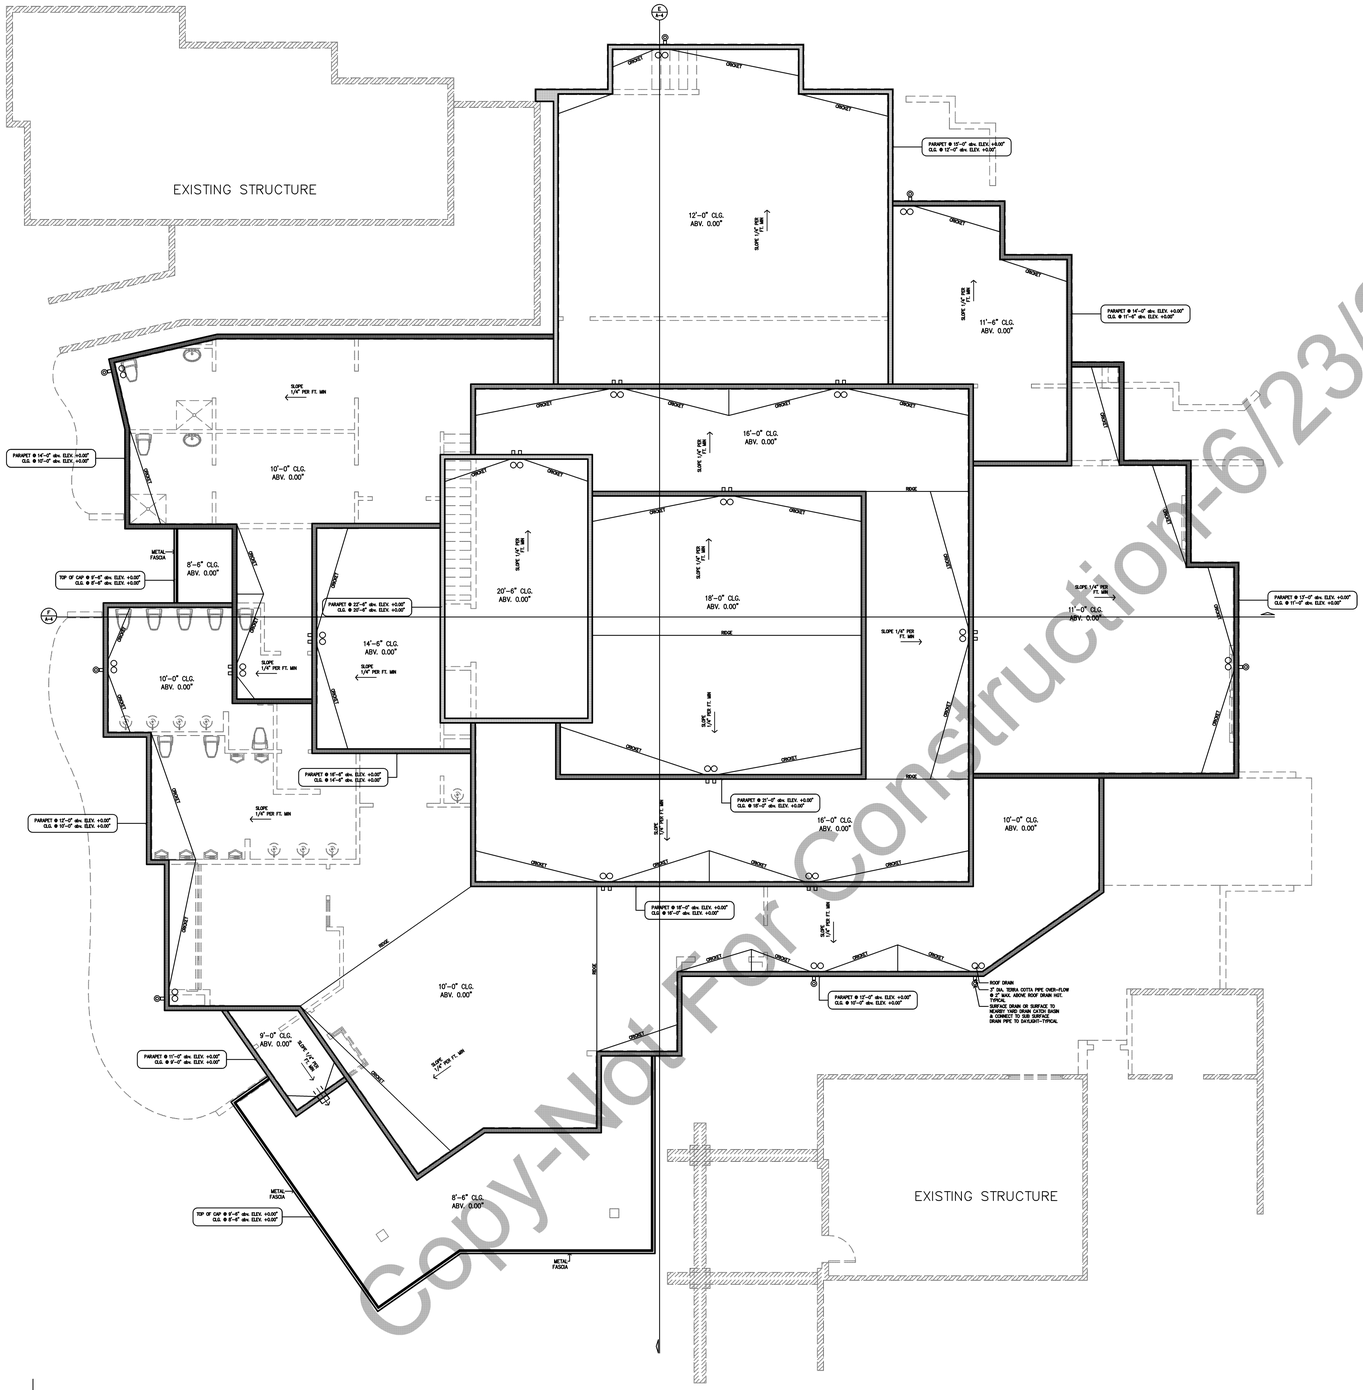


Copy-Not For Construction-6/23/2014

NOTE:
ADDITIONAL REQUIREMENTS FOR (PV) SOLAR PANEL INSTALLATION

THE ADDITION OF SOLAR PANELS WILL REQUIRE ADDITIONAL ACC APPROVAL AND THE POSSIBLE MODIFICATION TO THE HEIGHT OF PARAPETS AND OR ADDITIONAL PARAPETS TO SCREEN THE SOLAR PANELS FROM VIEW.

NOTE:
CEILING HEIGHTS ON THIS PLAN REFER TO THE MAXIMUM CEILING HT. IN ANY GIVEN AREA AS NOTED ABV. TOP OF FINISHED FLOOR. REFER TO THE CEILING PLAN FOR DROPPED CEILING HEIGHTS AND SPECIAL DETAILS.

NOTE:
USE MEMBRANE ROOF. REFER TO ROOF SPECIFICATIONS FOR MORE INFORMATION

NOTE:
INCLUDE RADIANT BARRIER ATTACHEED TO UNDER SURFACE OF ROOF SHEATHING.

ROOF DRAINAGE NOTES	
ROOF DRAIN	3" PVC ROOF DRAIN CONNECT TO 3" SCHEDULE 40 PVC , ABSOR DWV DOWNSPOUT. INSTALL WITHIN STUD WALL AND TERMINATE THRU WALL +2" ABOVE FINISH GRADE
CATCH BASIN	CATCH BASIN: 6" TO 4" PVC REDUCER WITH TOP AT FINISH GRADE. INSTALL 4" PVC DRAINAGE PIPE TO DAYLIGHT ATGRADE OR TO ANOTHER CATCH BASIN.
OVER FLOW	3 " DIA. TERRA COTTA PIPE OVER-FLOW @2" MAX. ABOVE ROOF DRAIN HGT.

All designs, plans and arrangements indicated or represented in the drawings are owned by and are the property of GDG and were created, evolved and developed for use on and in connection with this specific project. None of such designs, ideas, plans and arrangements shall be used or disclosed to any person, firm or corporation with out written permission of Gulch Design Group.

CENTER FOR THE ARTS
KAYENTA • IVINS, UT 84738

GULCH DESIGN GROUP, INC.

ROOF PLAN

A-5

SCALE: 1/8"=1'-0" | DATE: 06-20-14