
NOTE

1. This cross-section represents a relocation of the curb and gutter on the west side. The curb and gutter is shifted five feet eastward to allow for room for a 5' sidewalk that is ADA accessible and ties into the existing driveways.

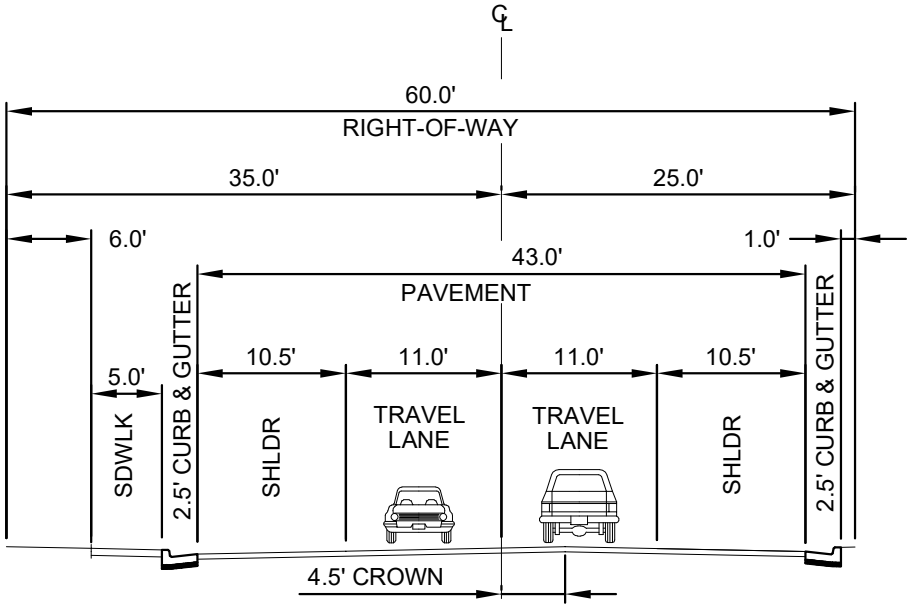


MINOR COLLECTOR - PUERTO DRIVE


SCALE: NONE DATE: Nov. 2020	IVINS CITY, UTAH	555 S. Bluff Street St. George, UT 84770 (435) 986-7888	Ivins City MINOR COLLECTOR - PUERTO DRIVE	CROSS SECTION NO. 5

NOTES-UDOT STANDARD DETAIL FOR B3 CURB

1. Type B3 curb shall not be continuous through residential driveways.
2. Type B3 curb detail shown below.

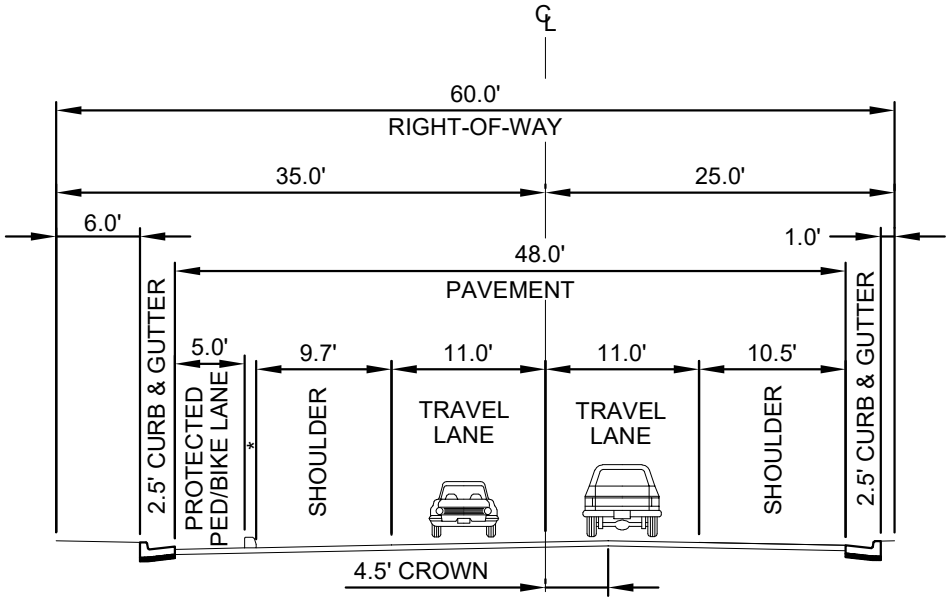

*SEE NOTES

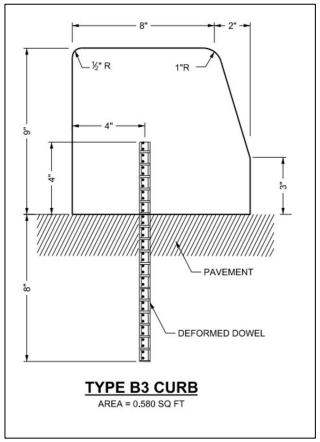

USE CURB TYPE B3 WITH DESIGN SPEED UP TO 40 MPH EXCEPT IN PREDOMINATELY URBAN OR RAPIDLY DEVELOPING RURAL AREAS WHERE CURBS MAY BE USED WITH DESIGN SPEEDS UP TO 50 MPH.

USE $\frac{3}{4}$ INCH DEFORMED DOWELS ON 5 FT MAXIMUM CENTERS.

PRECAST CURBS:

A. MINIMUM OF 10 FT IN LENGTH.
B. DOWELS AT A MINIMUM OF 3 PER 10 FT LENGTH.
C. INCLUDE ADEQUATE REINFORCING STEEL TO WITHSTAND HANDLING STRESSES.

MEASURE CURB HEIGHT VERTICALLY FROM THE FLOW LINE OF THE GUTTER TO TOP BACK OF CURB.

MINOR COLLECTOR - PUERTO DRIVE, CURB-SEPARATED PED/BIKE FACILITIES

SCALE: NONE DATE: Nov. 2020	IVINS CITY UTAH	555 S. Bluff Street St. George, UT 84770 (435) 986-7888	Ivins City MINOR COLLECTOR - PUERTO DRIVE	CROSS SECTION NO. 5